बहु-विषयक क्षेत्रीय रेल प्रशिक्षण संस्थान ,
धनबाद (भूली)

MULTI-DISCIPLINARY ZONAL RAILWAY
TRAINING INSTITUTE, DHANBAD (Bhuli)

TEMPORARY SINGLE LINE WORKING IN ON DOUBLE LINE IN AUTOMATIC BLOCK SYSTEM

(AS PER USR-9.12/3)

TEMPORARY SINGLE LINE WORKING IN AUTOMATIC BLOCK SYSTEM

- In the event of obstruction of one line on the double line section and the communications are available, the following procedure shall be adopted –

1. When it is desired to introduce temporary single line working on double line on electric communication instruments then:






TEMPORARY SINGLE LINE WORKING IN AUTOMATIC BLOCK SYSTEM

2. The decision to introduce temporary single line working and nomination of station should be taken by:

- Sr. DOM
- DOM (In charge)

TEMPORARY SINGLE LINE WORKING IN AUTOMATIC BLOCK SYSTEM

2. Temporary Single Line Working shall be introduced between the nearest stations provided with cross-over between Up and Down lines on either side of obstructions.

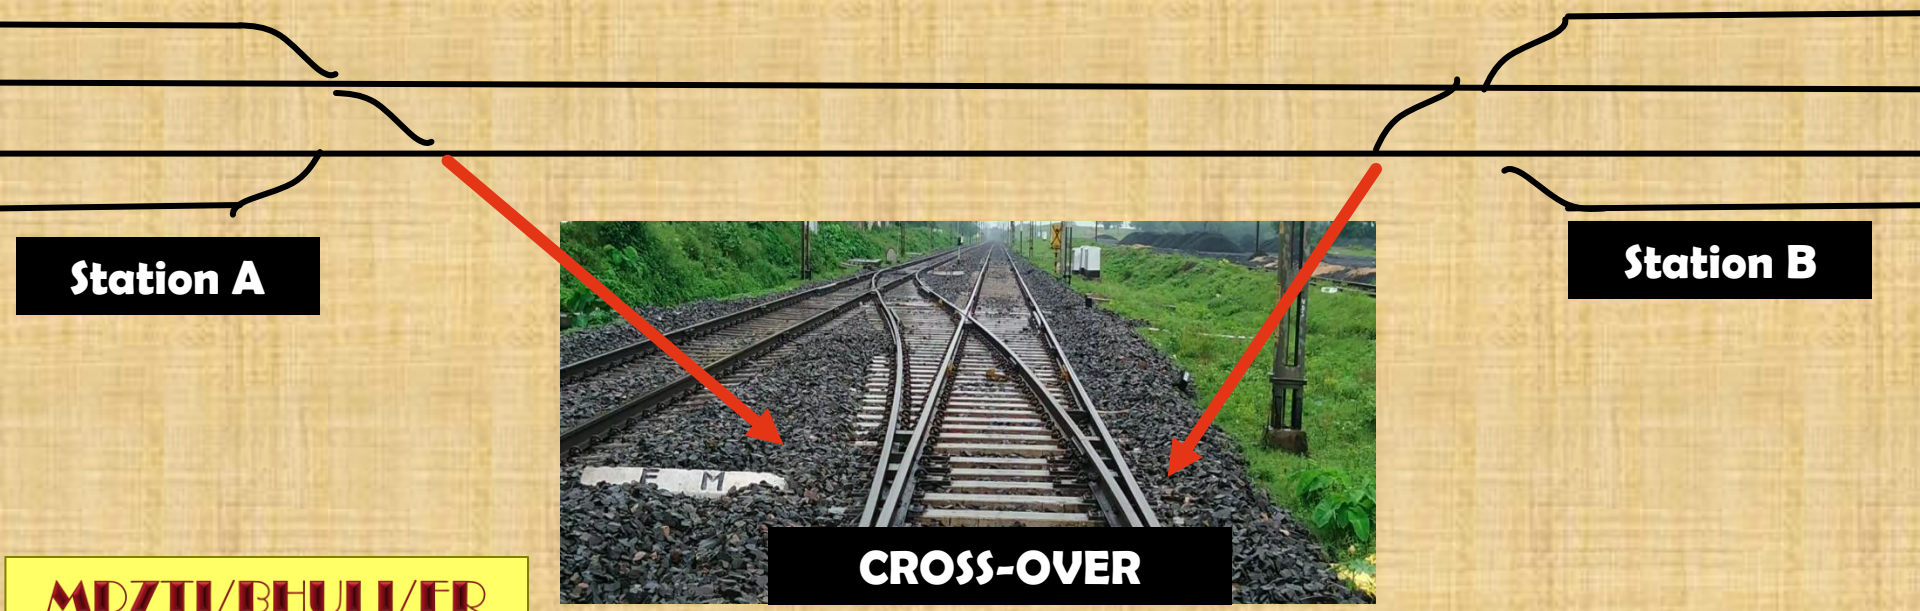


TEMPORARY SINGLE LINE WORKING IN AUTOMATIC BLOCK SYSTEM

3. If case of suspicion regarding clearance of line, SSE/JE P. Way certificate required.



TEMPORARY SINGLE LINE WORKING IN AUTOMATIC BLOCK SYSTEM

4. The Semi-Automatic /Manual Despatch Stop Signal of the Stations at both the ends of the section where temporary single line is being introduced shall be put in manual mode in ON condition for the entire duration of temporary single line working.

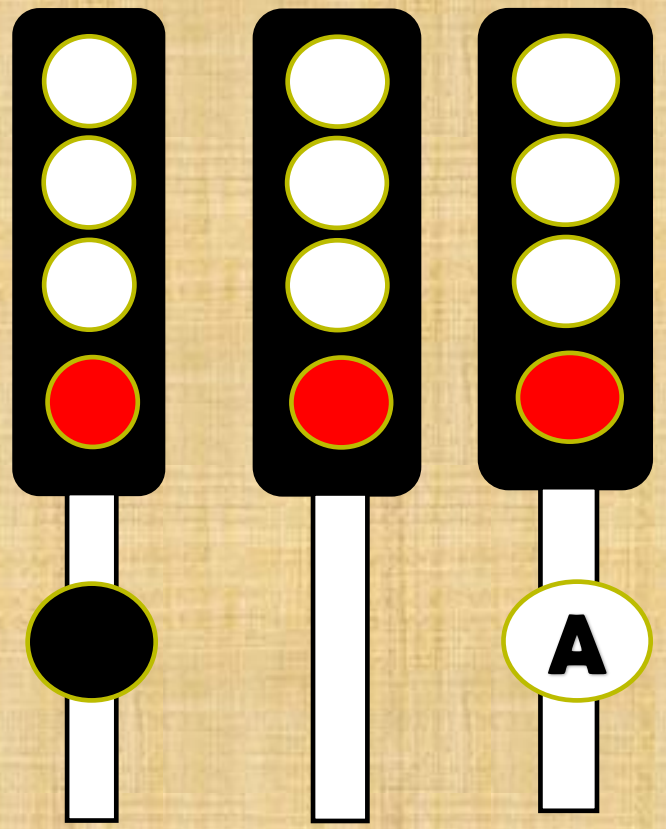

TEMPORARY SINGLE LINE WORKING IN AUTOMATIC BLOCK SYSTEM

7. All trains running in the wrong line shall be worked in accordance with the rules for the use of electric communication instruments on single line. Line clear shall be obtained on the following:

1



Station to Station fixed telephones

2



Railway auto phone & BSNL/MTNL phone with caller ID.

3



Railway control telephone

TEMPORARY SINGLE LINE WORKING IN AUTOMATIC BLOCK SYSTEM

7. All trains running in the wrong line shall be worked in accordance with the rules for the use of electric communication instruments on single line. Line clear shall be obtained on the following:

4



VHF set under special instructions, but not as the sole means of communication on sections where passenger trains run.

5



Fixed Telephone with CUG sim which have been provided to the station only for official use by the on-duty Station Master.

TEMPORARY SINGLE LINE WORKING IN AUTOMATIC BLOCK SYSTEM

9. Train Signal Register, shall be introduced at stations on affected section.

10. After ascertaining that one of the lines is clear for the passage of traffic, the Station Master proposing single line working shall issue a message under exchange of private Number, containing the following information, to the Station Master at the other end of the affected section :-

TEMPORARY SINGLE LINE WORKING IN AUTOMATIC BLOCK SYSTEM

a) Cause of introduction of single line working;

b) Place of obstruction;

c) The line by which single line working is proposed;

d) The source of information that the said line is clear;

e) Restriction of speed, if any, on the line;

f) The number and timings of the last train which arrived/left the station nominated.

TEMPORARY SINGLE LINE WORKING IN AUTOMATIC BLOCK SYSTEM

11. The Station Master on duty at the station in advance shall not give such "Line Clear" unless:-

a) The line is clear not only up to the Semi-Automatic/Manual Reception Stop Signal but also for the adequate distance beyond the Semi-Automatic/Manual Reception Stop signal.

b) The private number/s has been exchanged with on duty gatemen, for closure of the level crossing gate/s under his control.

c) The points of outlying sidings/ turnouts under his control are correctly set and locked.

d) For each first train running in the wrong line, line clear shall neither be asked nor given unless the two Station Masters have assured under exchange of private numbers that all the trains running in the right line have already arrived completely at the Station in advance.

TEMPORARY SINGLE LINE WORKING IN AUTOMATIC BLOCK SYSTEM

12. A written authority (form T/E 912) shall be given to Loco Pilot/Motorman and Train Manager of all trains in right and wrong line which includes.

a) *A 'line clear ticket' on Automatic block system during temporary single line working on double line.*

b) *Distinguishing numbers of departure, Automatic, modified Semiautomatic/Semi-Automatic/ Manual and Gate stop signals required to be passed (including non-governing signals), shall also be indicated on the authority authorising the Loco Pilot/Motorman to pass them at 'ON' position. For a Starter/ Manual and gate stop signal, the Loco Pilot/Motorman shall pass the signal only when he receives proceed hand signal from a railway servant in uniform. In the case of midsection gate stop signals the Loco Pilot/Motorman shall cautiously pass the level crossing only after ensuring that the gates are closed and locked for road traffic.*

T/E - 912

	(Zone Name) RAILWAY	Form No. T/ E 912
		Serial No. _____

AUTHORITY FOR TEMPORARY SINGLE LINE WORKING ON DOUBLE LINE AUTOMATIC BLOCK SYSTEM

(Loco Pilot / Train Manager/Station Master's Record)

Station_____ Date_____		Time: _____ hours ____ mins

To
The Motorman/ Loco Pilot of Engine / Train / Unit No._____ UP / DOWN.

The obstruction exists at km _____.

****LINE CLEAR TICKET**

Due to _____ single line working is introduced on _____ line between _____ and _____ stations.

Line clear has been received from _____ station under his Private No. (in words) _____ (in figures) _____.

You shall bring your Train/ Engine/ Unit No._____ to stand outside first Stop Signal / Last Stop Signal pertaining to wrong line* of the station and thereafter be guided by the instructions from the Station Master of _____station.

T/E - 912

***AUTHORITY TO PASS SIGNALS IN 'ON' POSITION ON WRONG LINE WITH CAUTION ORDER**

On wrong line- When running in wrong line the train shall be piloted out of the station after all the concerning points have been correctly set and locked. The loco pilot/ motorman shall ascertain:

(i) That points of outlying sidings, where provided, are correctly set and locked and/ or the level crossing gate No.s_____ are locked and;

(ii) Hand signals are displayed by the railway servant in uniform at the points, level crossing gates before passing them. You shall cautiously pass the level crossing only after ensuring that the gates are locked.

Here indicate distinguishing Nos. of all Non-governing signals to be thus passed: _____

_____

*Your Train is First Train going on Wrong line to pass over the Temporary Single Line. Speed shall be **restricted to 25 kmph** subject to observance of other speed restriction in force. Loco Pilot should switch "ON" the flasher light of the train engine and inform all Gatemen and Gangmen.

*Your Train is NOT the First train on Wrong line to pass over the Temporary Single Line. Train is permitted to work at sectional speed, subject to other **speed restriction** in force.

Following are the additional Caution Orders in force in Block Section (For trains going in wrong line)

Sr No	Station between		Kilometer		Speed KMPH	Cause/ Remarks
	From	To	From	To		
1.						
2.						

MDZTI/BHULI/ER

T/E - 912

***AUTHORITY TO PASS SIGNALS IN 'ON' POSITION ON RIGHT LINE WITH CAUTION ORDER**

* **First train on right line** - You are, hereby authorized to pass Departure signals and all intervening Automatic signals between _____station and _____station at 'ON' on this authority. In addition, you are also authorized to pass Semi-Automatic/ manually operated/ gate stop signals on being hand signalled past such signals by a railway servant in uniform from the foot of signal. You shall cautiously pass the level crossing only after ensuring that the gates are locked.

Speed shall be restricted to 25 kmph subject to observance of other speed restriction in force.

Here indicate distinguishing Nos of all signals to be thus passed: _____

_____

* **Subsequent trains following First train on right line** - You are, hereby authorized to pass Departure signals No. _____ of _____ station at 'ON' on this authority and thereafter be guided by the aspect of the intervening signals.

Train is permitted to work at sectional speed, subject to other speed restriction in force.

_____

Signature and Stamp of Station Master

I have understood the contents of this authority.

Signature of Train Manager_____	Date_____ Time_____ Hours_____ minute
Signature of Loco Pilot_____	Date_____ Time_____ Hours_____ minute

* Strike out whichever is not applicable. **Strike out whenever is not applicable

T/E - 912

IMPORTANT INSTRUCTIONS

Motorman / Loco Pilot proceeding on this authority must observe the following precautions

1. You are expressly warned to observe "Neutral section" (only in Electrified section) if your Train is going on wrong line. There are no Trap Points on the line in question/ Trap points have been clamped/ spiked.

2. The instruction that Automatic signals in the wrong line should be considered as out of use even though they may be showing 'Proceed' or 'Caution' aspect

3. The speed over facing points shall be restricted to 15 kmph.

4. Loco Pilot should switch "ON" the flasher light of the train engine while running on the wrong line on proper authority to proceed. In case, the train engine running on the wrong line without switching on the flasher light is noticed by the station staff, Gatemen and Gangmen they shall stop the train immediately."

5. Line clear ticket to be striked out in case of subsequent trains following the first train on the right line.

MDZTI/BHULI/ER

TEMPORARY SINGLE LINE WORKING IN AUTOMATIC BLOCK SYSTEM

13. A caution order which shall clearly state:-

i. The line on which the train or light engine is to run;

ii. The kilometers between which the obstruction exists.

iii. Any restriction of speed which may have been imposed; and


iv. The instruction that Automatic signals in the wrong line should be considered as out of use even though they may be showing 'Proceed' or 'Caution' aspect

v. The train started on the wrong line shall be piloted out of the station after all the concerning points have been correctly set and locked.

vi. Location of the Neutral section if any.

TEMPORARY SINGLE LINE WORKING IN AUTOMATIC BLOCK SYSTEM

14. For every first train in the right line the procedure laid down for the trains running in the wrong line shall be followed and the authority T/E 912 shall be issued.

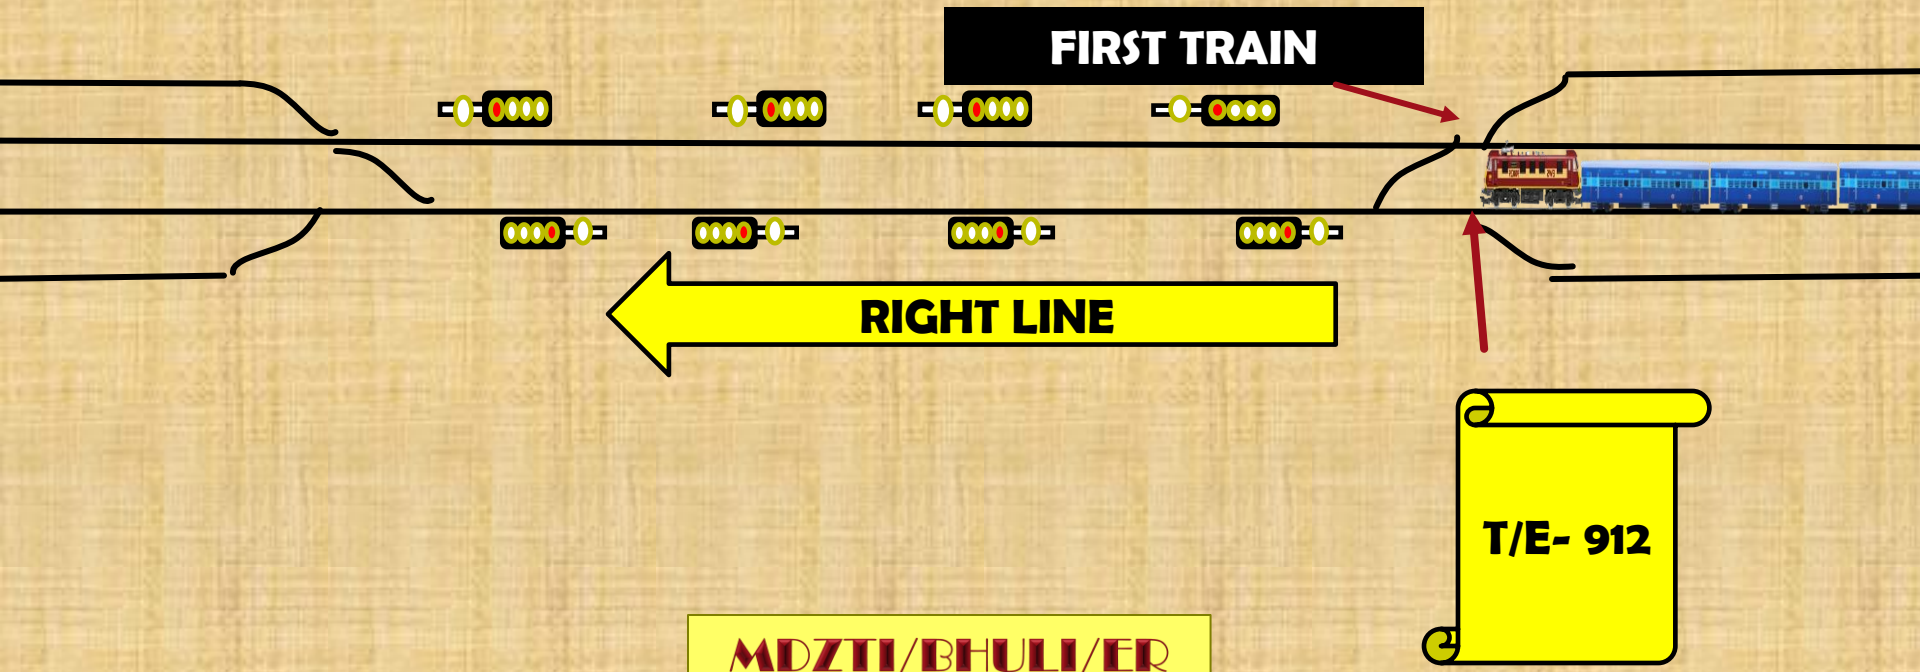


TEMPORARY SINGLE LINE WORKING IN AUTOMATIC BLOCK SYSTEM

14. The subsequent trains running in the right line may be allowed to follow each other as per the signal aspect in Automatic Block System.

15. Private numbers shall be exchanged for every such movement.

16. The written authority (T/E 912) shall also be given to the subsequent trains following the first train running in the right line. The station master shall however strike out the line clear ticket portion in the authority T/E 912.

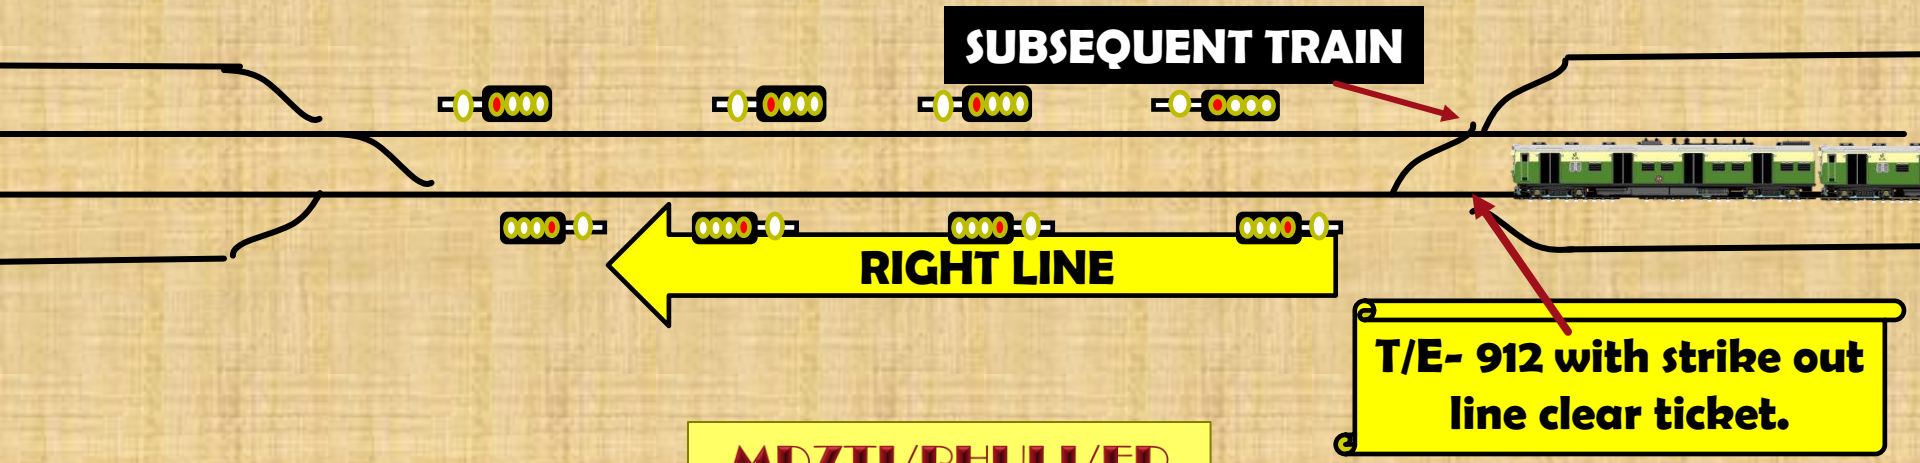

TEMPORARY SINGLE LINE WORKING IN AUTOMATIC BLOCK SYSTEM

17. The Loco Pilot/Motorman of the first train introducing temporary single line working in the wrong line to stop and inform all Gatemen and Gangmen on the way about the introduction of temporary single line working.



GANGMAN



GATEMAN

TEMPORARY SINGLE LINE WORKING IN AUTOMATIC BLOCK SYSTEM

18. **The Loco Pilot should switch "ON" the flasher light of the train engine while running on the wrong line on proper authority to proceed.**



Note: *In case, the train engine running on the wrong line without switching on the flasher light is noticed by the station staff, Gatemen and Gangmen they shall stop the train immediately."*

MDZTI/BHULI/ER

TEMPORARY SINGLE LINE WORKING IN AUTOMATIC BLOCK SYSTEM

20. SPEED:

a) **Wrong line:**

i. **First train :** *not exceeding 25 kmph subject to other speed restrictions.*

ii. **Subsequent trains:** *may be permitted to run on sectional speed subject to other speed restrictions.*

b) **Right Line:**

i. **First train :** *not exceeding 25 kmph subject to other speed restrictions.*


ii. **Subsequent trains:** *may be permitted to run on sectional speed subject to other speed restrictions. However, the speed over facing points, if any, being restricted to 15 KMPH.*

TEMPORARY SINGLE LINE WORKING IN AUTOMATIC BLOCK SYSTEM

21. Reception:

a) **Wrong line:**


i. the Loco Pilot/Motorman of the train running in the wrong line shall bring his train to a stand before the point opposite the Semi-Automatic/Manual Reception Stop Signal pertaining to the correct line or the Semi-Automatic/Manual Despatch Stop Signal pertaining to the wrong line on which he is running or any Shunt signal protecting the outermost Cross-over, whichever he comes across first, and sound one long whistle.

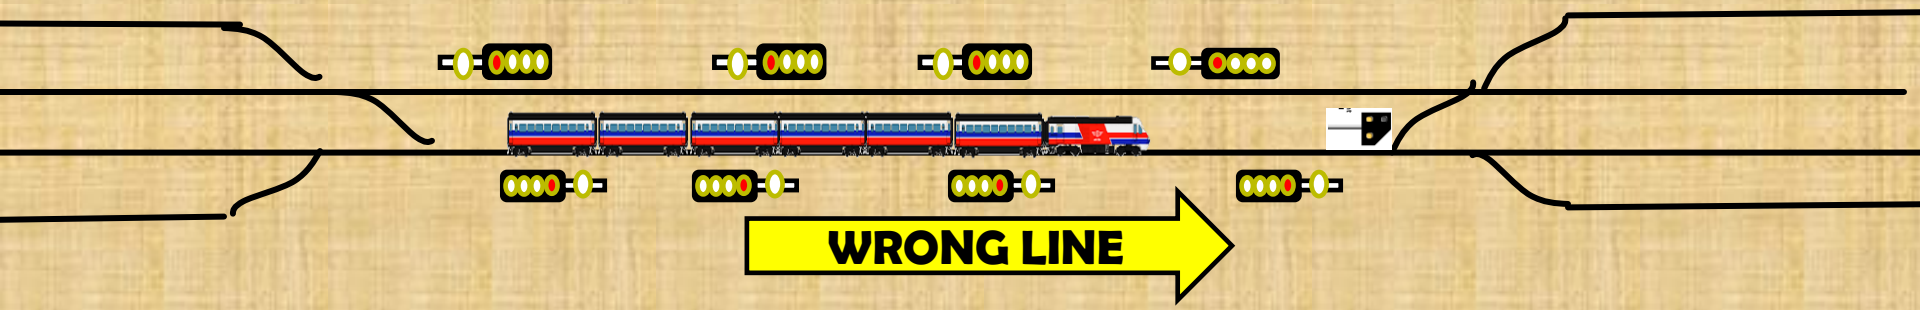

TEMPORARY SINGLE LINE WORKING IN AUTOMATIC BLOCK SYSTEM

21. Reception:

a) Wrong line:

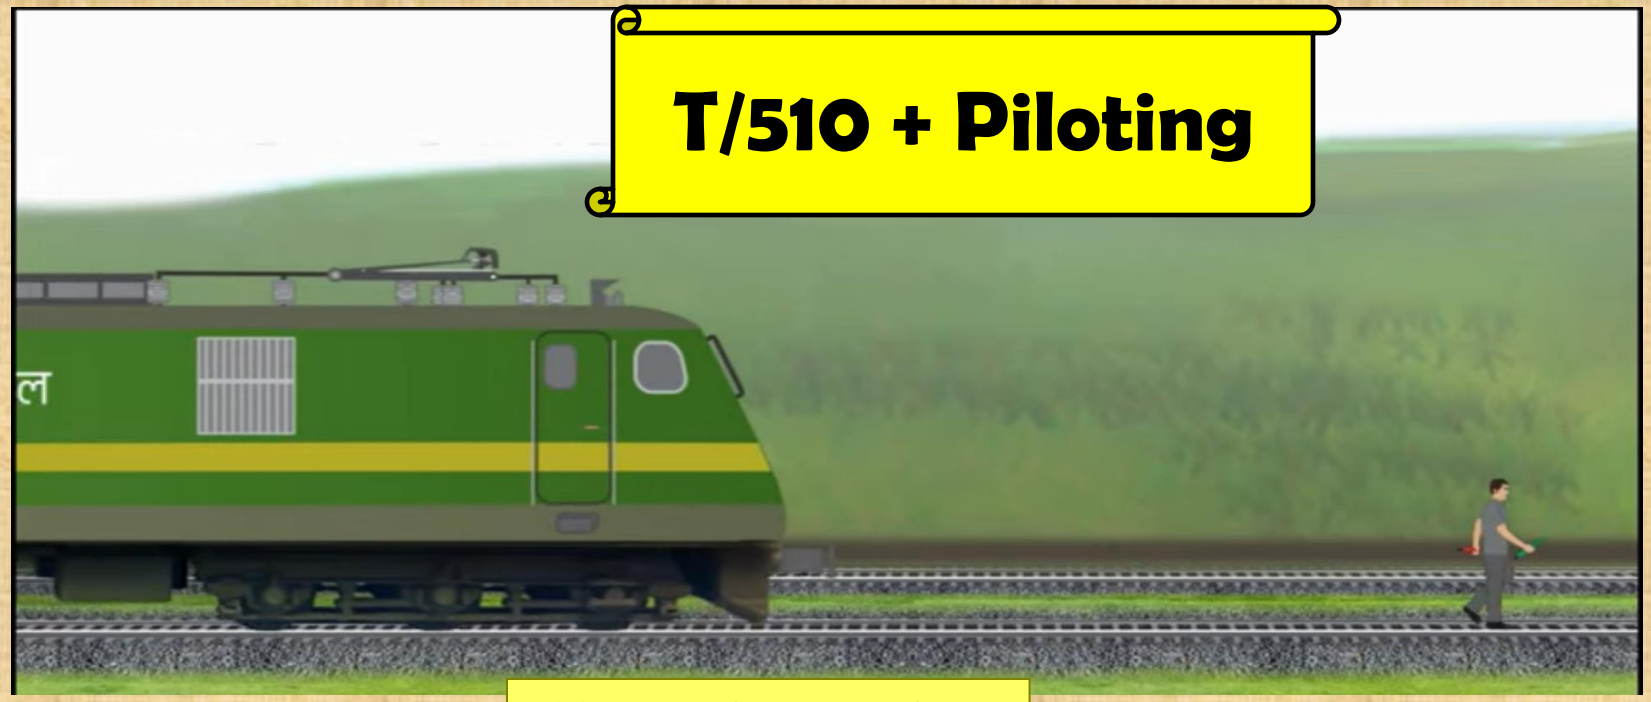

TEMPORARY SINGLE LINE WORKING IN AUTOMATIC BLOCK SYSTEM

21. Reception:

b) Right line:

1

By taking OFF approach signal



OR

2

T/369(3b) after fulfilling signal taking OFF condition



NOTE: -Condition for taking OFF Semi-Automatic/Manual Reception Stop Signal have been fulfilled.

MDZTI/BHULI/ER

TEMPORARY SINGLE LINE WORKING IN AUTOMATIC BLOCK SYSTEM

22. Resumption of normal working:

a) *Certificate from a responsible engineering official.*

b) *A message by SM in prescribed format under exchange of private number.*

c) *Decision in consultation with Section Controller the train after the passage of which the normal working has to be introduced.*

From Station Master/X To Station Master/Y No. _____ Last Train (Number and description)_____ which left from your station at ____hours arrived completely at my station at __ Hrs___ mins Cancel the present method of working of trains. Private Number (In figures)_____ (In words)_____
From Station Master/Y To Station Master/X No._____ Your No. _____Understood, that Train No. _____which left my station has arrived complete at your station at _____ Hours. Present system of train working is cancelled Private Number (In figures) _____(In words)_____

TEMPORARY SINGLE LINE WORKING IN AUTOMATIC BLOCK SYSTEM

23. An entry shall also be made in the Train Signal Register of all stations concerned showing the time at which double line working was suspended, single line working was suspended and the time at which normal working was resumed.

24. TI report to the Sr. Divisional Operations Manager / Divisional Operations Manager (in-charge) within 7 days of the resumption of normal working after scrutiny of necessary documents.



बहु-विषयक क्षेत्रीय रेल प्रशिक्षण संस्थान , धनबाद (भूली)

MULTI-DISCIPLINARY ZONAL RAILWAY TRAINING INSTITUTE, DHANBAD (Bhuli)



शिक्षार्थ आइये
सेवार्थ जाइये