बहु-विषयक क्षेत्रीय रेल प्रशिक्षण संस्थान ,
धनबाद (भूली)

MULTI-DISCIPLINARY ZONAL RAILWAY
TRAINING INSTITUTE, DHANBAD (Bhuli)

PROLONG FAILURE OF AUTOMATIC SIGNAL BUT COMMUNICATION AVAILABLE

(AS PER USR – 9.12/2(A))


PROLONG FAILURE OF AUTOMATIC SIGNAL BUT COMMUNICATION AVAILABLE

1) The decision whether to consider a failure of signal/s as a prolonged failure should be taken by:

- Sr. DOM
- DOM (In charge)

PROLONG FAILURE OF AUTOMATIC SIGNAL BUT COMMUNICATION AVAILABLE

2) Failure of signal/s occurring in an area consisting of two or more block stations worked under Automatic Block system which is likely to last for some time should be:

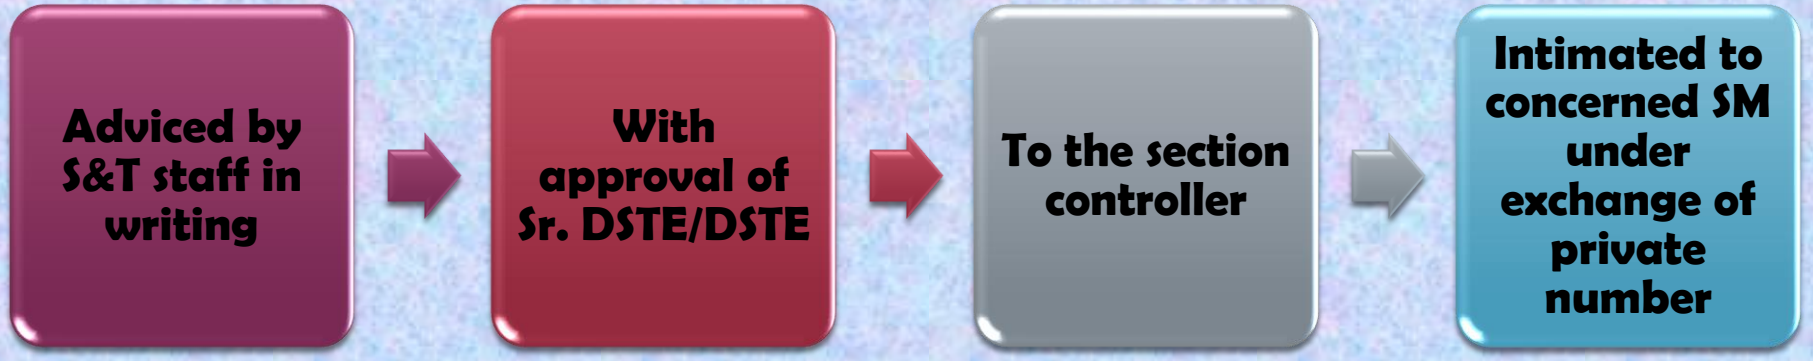

PROLONG FAILURE OF AUTOMATIC SIGNAL BUT COMMUNICATION AVAILABLE

3) Before any train is allowed to enter the affected section, it shall be brought to a stand and information sent to



Loco Pilot



Train Manager




SM of other end



Controller

PROLONG FAILURE OF AUTOMATIC SIGNAL BUT COMMUNICATION AVAILABLE

4) The section between the two block stations will be treated as a Single Block Section & train movement in Block Section shall be controlled by the Station Master of either side.

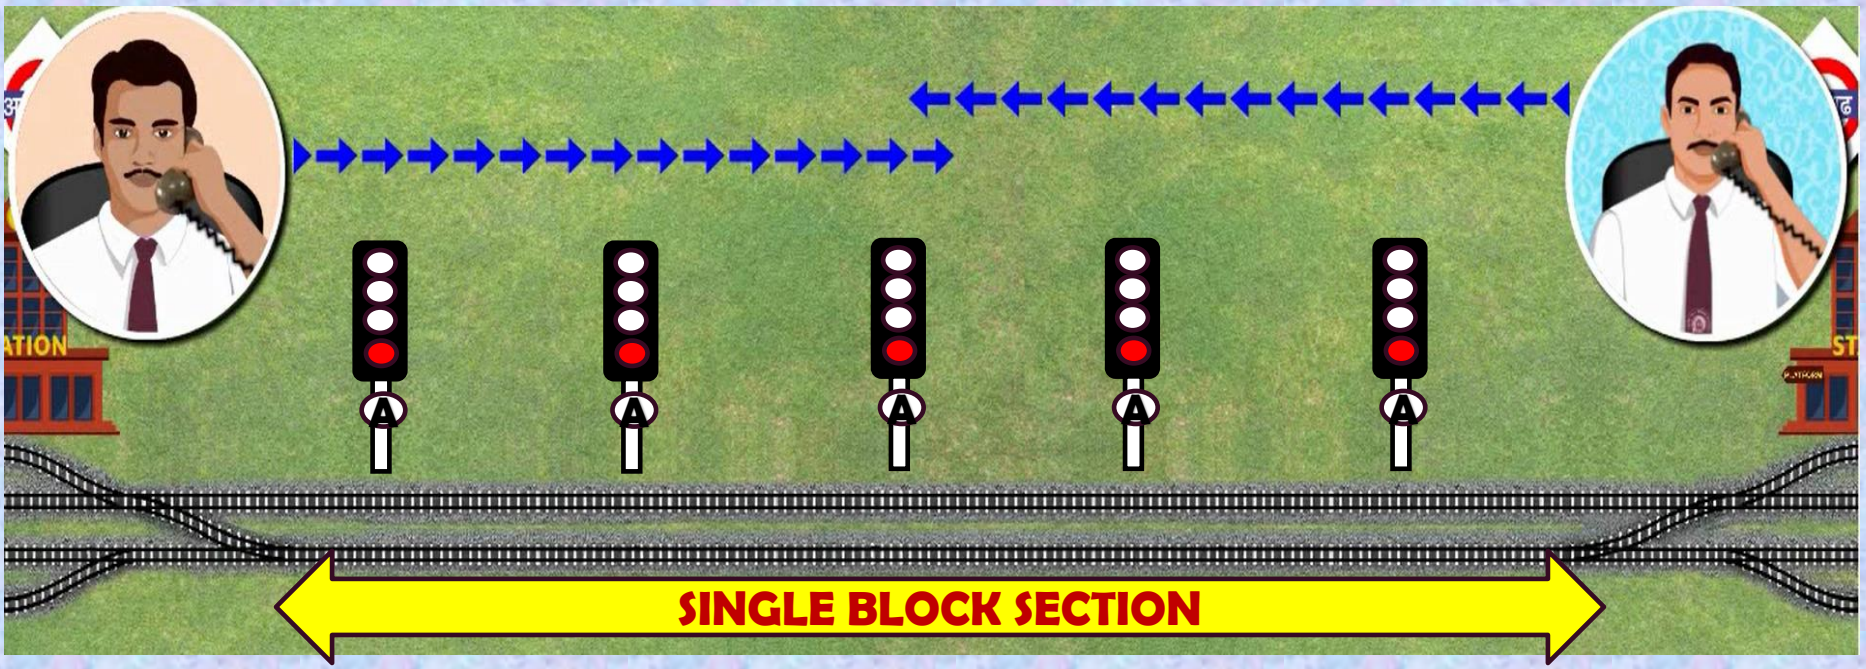


PROLONG FAILURE OF AUTOMATIC SIGNAL BUT COMMUNICATION AVAILABLE

5) Before introduction of such working, it shall be ensured that all the trains dispatched in the affected section have completely arrived at the station in advance.



PROLONG FAILURE OF AUTOMATIC SIGNAL BUT COMMUNICATION AVAILABLE

6) Additionally, it shall be ensured that, the Semi-Automatic/Manual Despatch Stop Signal of all stations dispatching trains in the affected section and the Semi-Automatic/Manual Reception Stop Signals of all stations receiving trains in the affected section, shall be put in manual mode and in ON position initially.

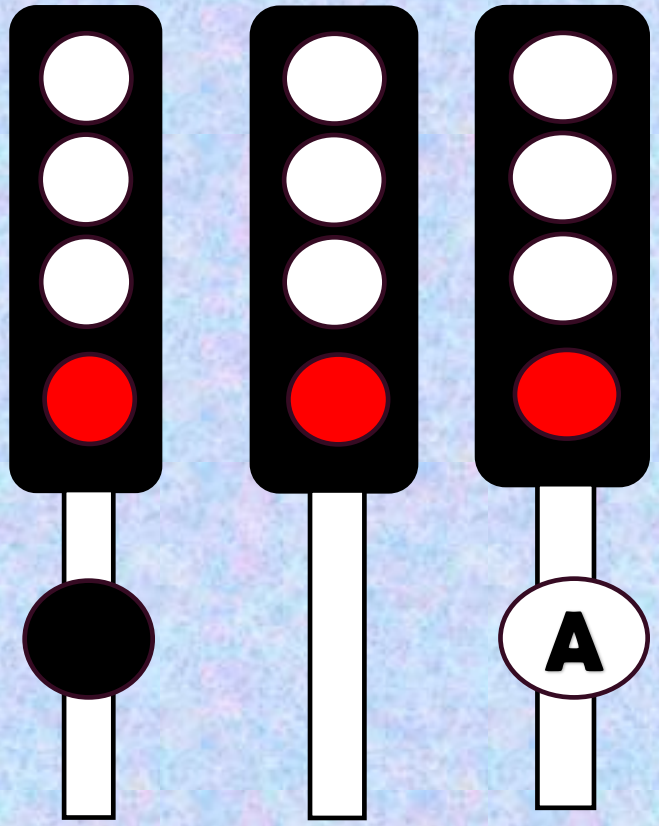

PROLONG FAILURE OF AUTOMATIC SIGNAL BUT COMMUNICATION AVAILABLE

6) **The Station Master shall advise the Station Master at the other end regarding suspension of Automatic Working in the following Format.**

From
Station Master/X

To
Station Master/Y

No. _____

Automatic Block working suspended between_____ and_____ stations at____ Hours _____minutes due to _____(Reasons) Train signaling shall be done through Station-to-Station fixed telephone /Railway Auto Phone/ BSNL phone/Fixed Telephone with CUG sim or Control Telephone/Very High Frequency set.

Private Number (In figures)_____ (In words)_____

From
Station Master/Y

To
Station Master/X

No. _____

Your No._____ Understood that Automatic Block working suspended between_____ and _____stations at____ Hours _____minutes due to _____(Reasons) Train signaling shall be done through Station-to-Station fixed telephone /Railway Auto Phone/ BSNL phone/Fixed Telephone with CUG sim or Control Telephone/Very High Frequency set.

Private Number (In figures)_____ (In words)_____

PROLONG FAILURE OF AUTOMATIC SIGNAL BUT COMMUNICATION AVAILABLE

7) The station master shall obtain line clear for the train by one of the following means of communications viz.

1



Station to Station fixed telephones

2



Railway auto phone & BSNL/MTNL phone with caller ID.

3



Railway control telephone

PROLONG FAILURE OF AUTOMATIC SIGNAL BUT COMMUNICATION AVAILABLE

7) The station master shall obtain line clear for the train by one of the following means of communications viz.

4



VHF set under special instructions, but not as the sole means of communication on sections where passenger trains run.

5



Fixed Telephone with CUG sim which have been provided to the station only for official use by the on-duty Station Master.

PROLONG FAILURE OF AUTOMATIC SIGNAL BUT COMMUNICATION AVAILABLE

8) **The stations master on duty at the station in advance shall not give such ' Line clear' unless**

I. *The whole of the last preceding train has arrived complete.*

II. *The Semi-Automatic/Manual Reception Stop Signal has been put back to 'ON' behind the last preceding train.*

III. *The line is clear not only up to the Semi-Automatic/Manual Reception Stop Signal but also for the adequate distance beyond the Semi-Automatic/Manual Reception Stop signal.*

IV. *The private number/s shall be exchanged with on duty gatemen, for closure of the level crossing gate/s under his control.*

V. *The points of outlying sidings/ turnouts under his control are correctly set and locked.*

PROLONG FAILURE OF AUTOMATIC SIGNAL BUT COMMUNICATION AVAILABLE

9) **SPEED:**

a) Not exceeding 25 KMPH under any circumstances, subject to other speed restrictions in force



MDZTI/BHULI/ER

PROLONG FAILURE OF AUTOMATIC SIGNAL BUT COMMUNICATION AVAILABLE

9) **SPEED:**


b) If the view is restricted due to fog, curve or any other reason, speed shall not exceed 10 KMPH.



PROLONG FAILURE OF AUTOMATIC SIGNAL BUT COMMUNICATION AVAILABLE


9) **SPEED:**

c) The speed over facing points, if any, being restricted to 15 KMPH.

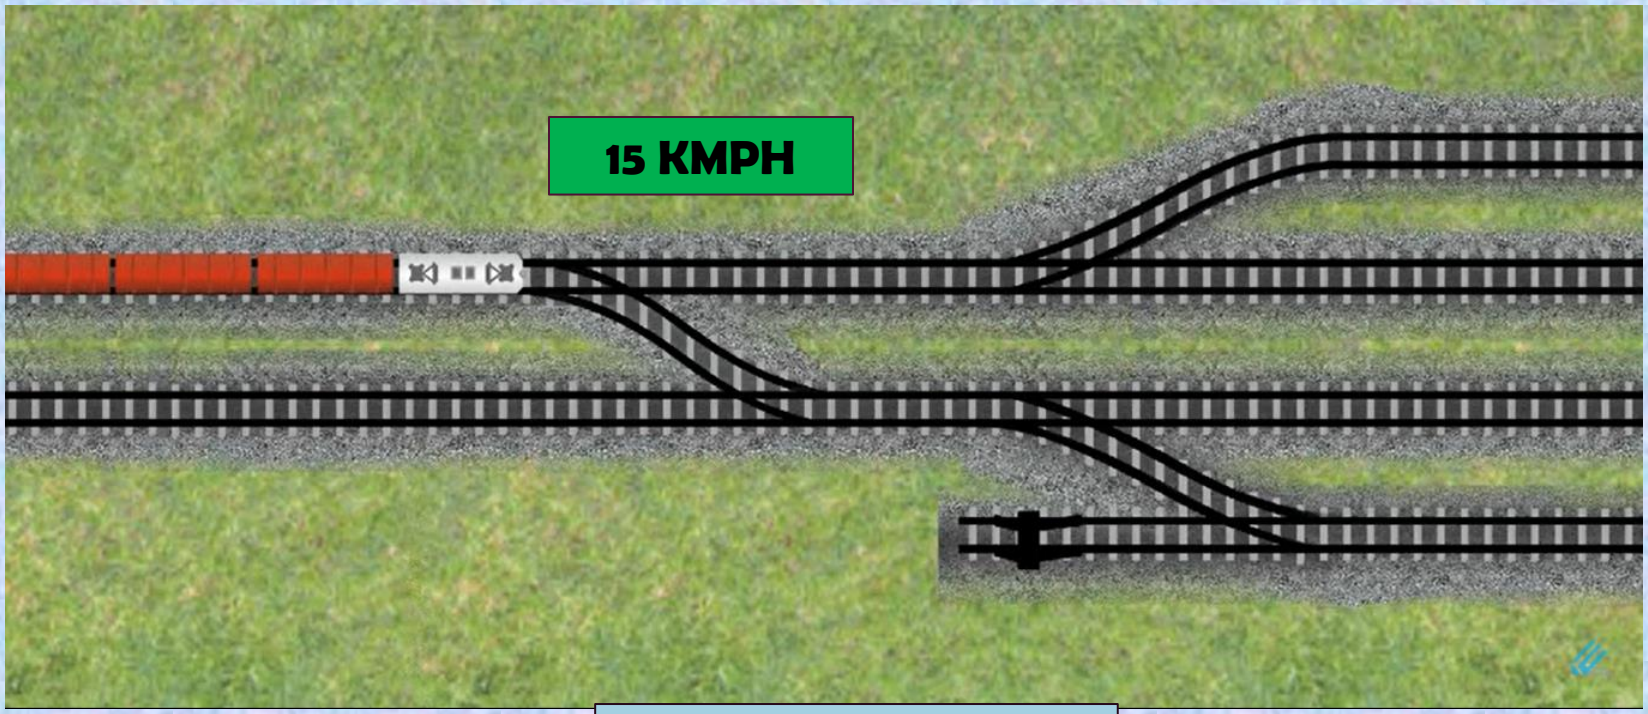

PROLONG FAILURE OF AUTOMATIC SIGNAL BUT COMMUNICATION AVAILABLE

10) The Loco Pilot and Guard shall be issued T/D – 912 .

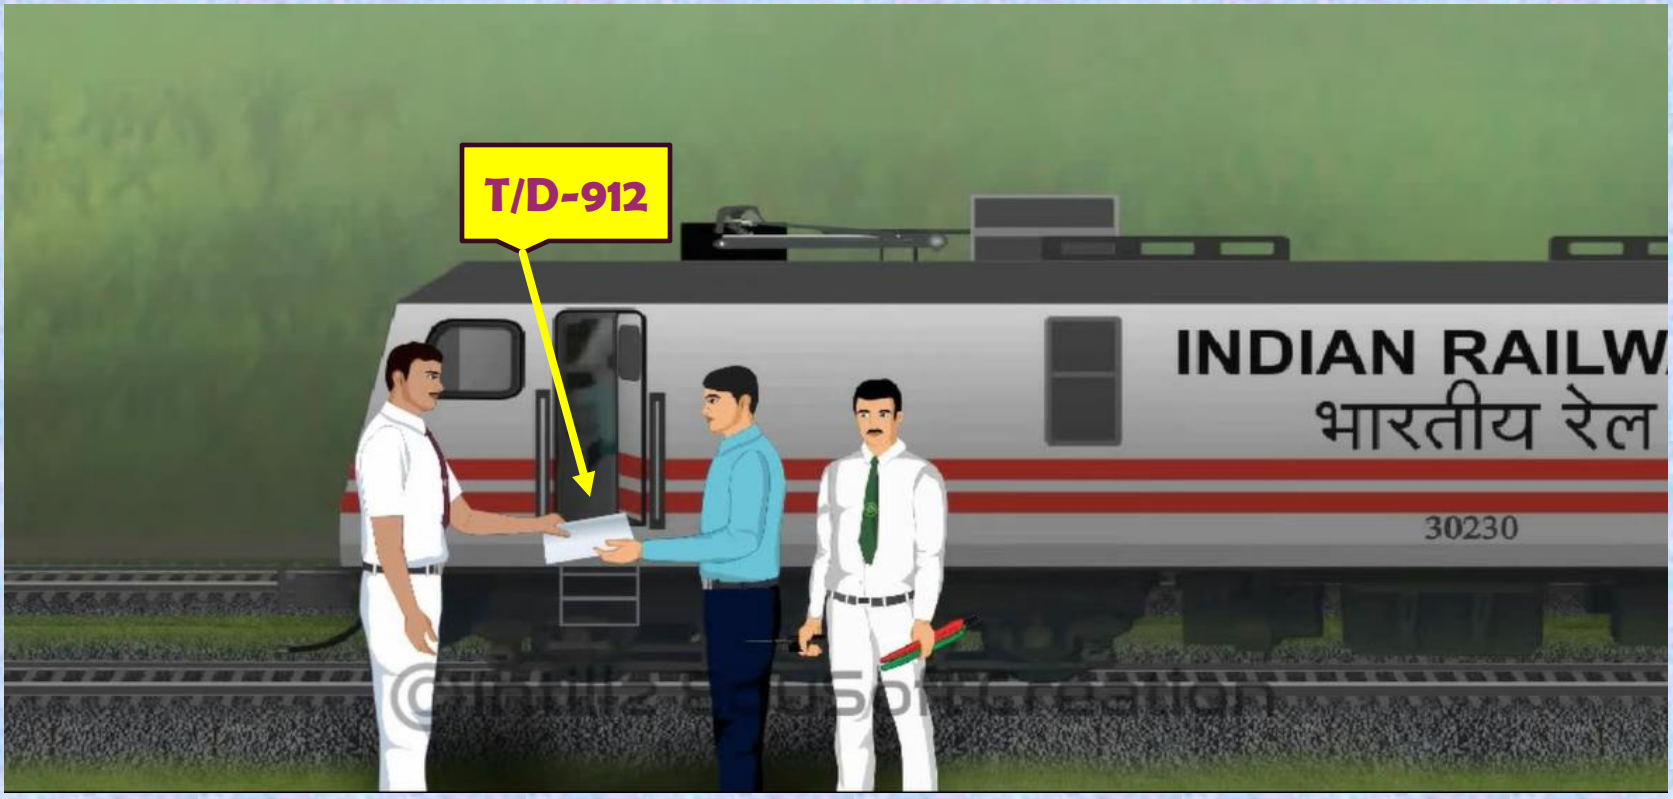

T/D - 912

EASTERN RAILWAY — Form No. T/ D 912

Serial No. _____

AUTHORITY FOR WORKING OF TRAINS
DURING PROLONGED SIGNAL FAILURE IN AUTOMATIC BLOCK SYSTEM
(Loco Pilot / Train Manager / Station Master's Record)

Station_____ Time:_____hours_____ mins
Date_____

To
The Motorman / Loco Pilot of Engine / Train / Unit No._____UP / DOWN.

AUTHORITY TO PROCEED

1. All signals between_____station and_____station have failed.
2. Line clear has been received from_____station under his Private No. (in words) _____(in figures)_____.
3. You are authorized to work your Engine / Train / Unit No._____up to the Semi–Automatic/ Manual First Reception Stop Signal of_____station and thereafter be guided by the aspect of the Semi–Automatic / Manual First Reception Stop Signal or the instructions from the Station Master of the_____station.

AUTHORITY TO PASS SIGNALS IN 'ON' POSITION

You are also authorized to pass
1. Departure signals and all intervening Automatic signals between_____station and_____station at "ON".
2. Starter / Manual Stop Signal / Gate stop signals on being hand signalled past such signals by a railway servant in uniform.
3. You shall cautiously pass level crossing gates only after ensuring that the gates are closed.
4. Here indicated distinguishing numbers of all signals to be thus passed _____

MDZTI/BHULI/ER

T/D - 912

CAUTION ORDER

Your train is the First train to pass over the UP / DOWN line during prolonged failure of Automatic signaling from_____station to_____station. **Speed shall be restricted to 25 kmph when the view is clear and 10 kmph when view ahead is impaired subject to other speed restrictions.**

Your train is NOT the First and is authorized to pass over the UP / DOWN line from _____station to_____station with the **Sectional speed subject to other speed restrictions.**

The speed over facing points, if any, being restricted to 15kmph.

*Strike out whichever is not applicable.

_____

Signature and Stamp of Station Master

I have understood the contents of this authority

Signature of Train Manager_____ Date:_____Time:_____hours_____mins

Signature of Loco Pilot / Motorman_____ Date:_____Time:_____hours_____mins

MDZTI/BHULI/ER

PROLONG FAILURE OF AUTOMATIC SIGNAL BUT COMMUNICATION AVAILABLE

7) **Reception of train at next station.**


1

By taking OFF approach signal



2

T/369(3b) after fulfilling signal taking OFF condition

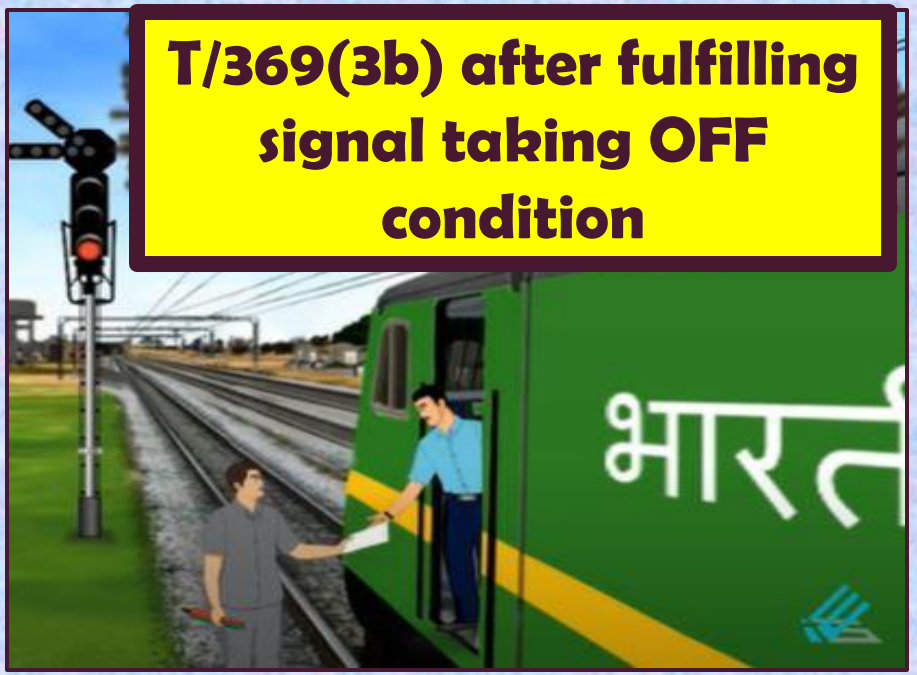


MDZTI/BHULI/ER

PROLONG FAILURE OF AUTOMATIC SIGNAL BUT COMMUNICATION AVAILABLE


8) Clearance of the section by each train under exchange of Private Number.

9) Train Signal Register shall be brought into use.

10) Section Controller shall be kept advised of all train movements taking place in the affected section.

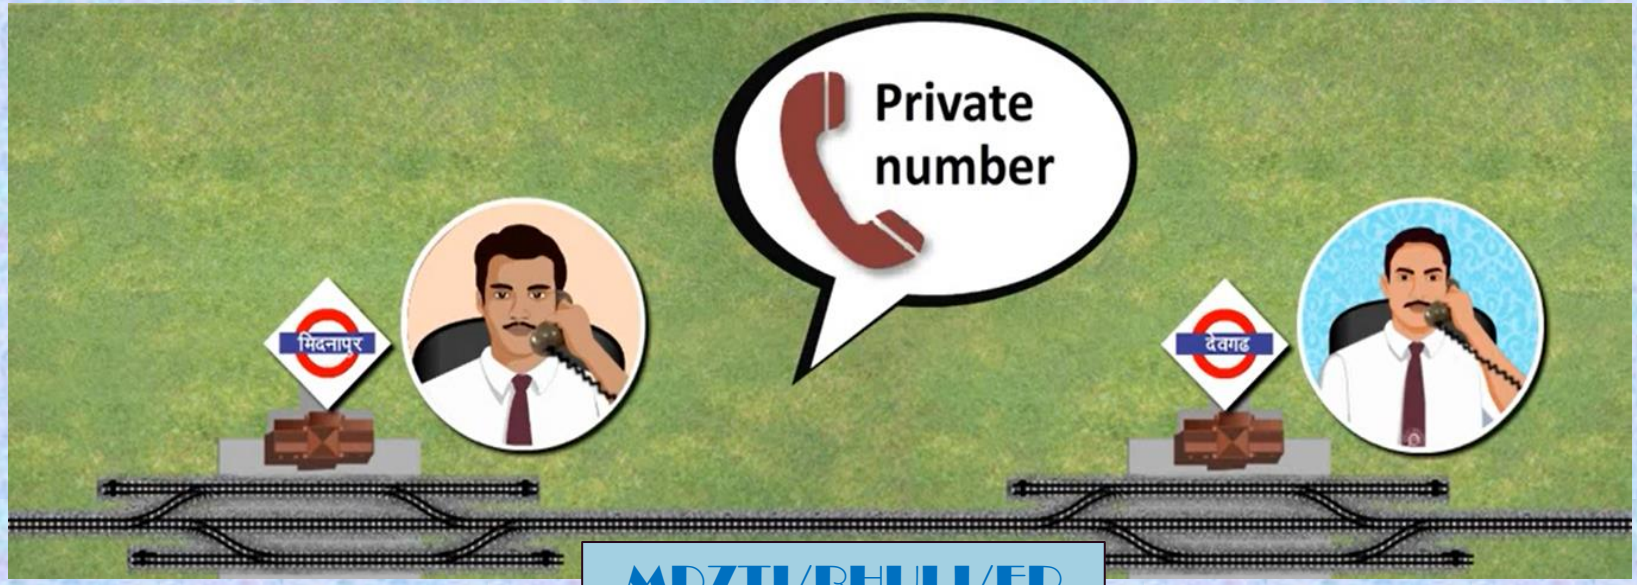

PROLONG FAILURE OF AUTOMATIC SIGNAL BUT COMMUNICATION AVAILABLE

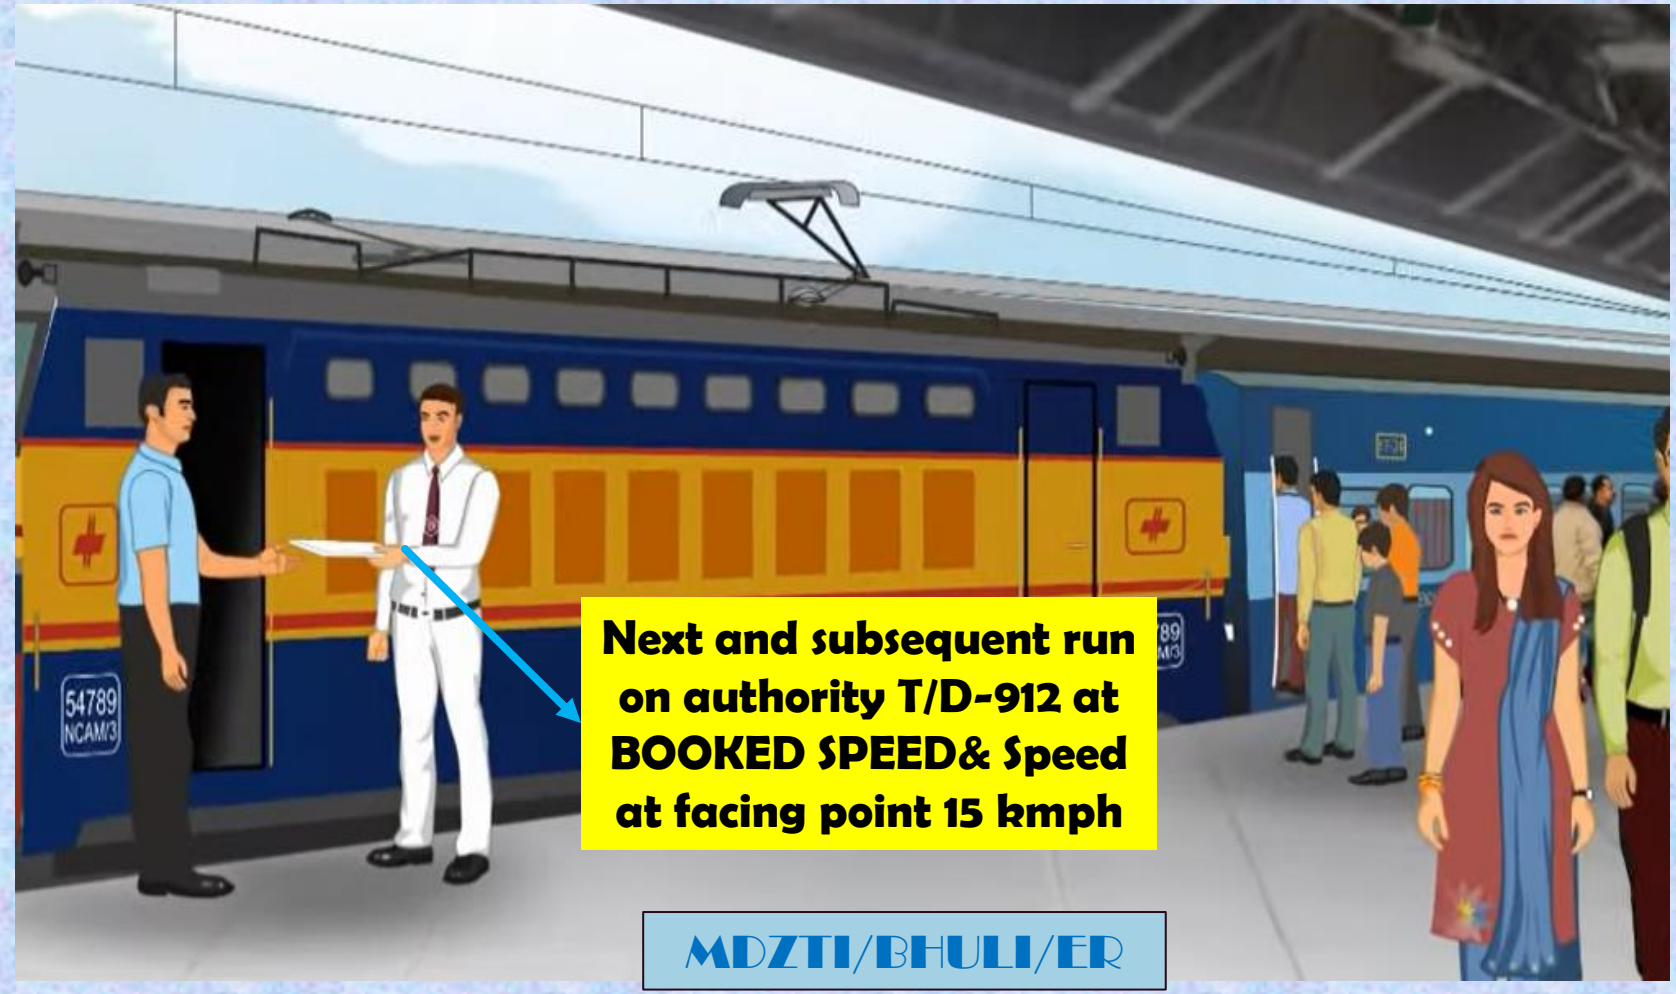

MDZTI/BHULI/ER

PROLONG FAILURE OF AUTOMATIC SIGNAL BUT COMMUNICATION AVAILABLE

10) **RESUMPTION OF NAORMAL WORKIG: (Pre-conditions)**

i. **Signal put right memo by the S&T officials in writing.**

ii. **Permission of section controller.**

iii. **Exchange of message with Private Numbers by the concerned Station Master in required format and in Train Signal Register.**

iv. **Complete arrival of last train.**

v. **Intimation of restoration to section controller under exchange of private number.**



PROLONG FAILURE OF AUTOMATIC SIGNAL BUT COMMUNICATION AVAILABLE

11) Format of message exchanged:

From
Station Master/X

To
Station Master/Y

No. _____Last Train (Number and description)_____ despatched during failure from your station at ____hours___mins has arrived completely at my station at ___hours___mins. Cancel the present method of working of trains.

Private Number (In figures)_____ (In words)_____

From
Station Master/Y


To
Station Master/X

No. _____ Your No. _____understood Last Train (Number and description)_____ despatched during failure from my station at ____hours___mins has arrived completely at your station at__hours___mins. Cancel the present method of working of trains.

Private Number (In figures)_____ (In words)_____

PROLONG FAILURE OF AUTOMATIC SIGNAL BUT COMMUNICATION AVAILABLE

11) TI report to the Sr. Divisional Operations Manager / Divisional Operations Manager (in-charge) within 7 days of the resumption of normal working after scrutiny of necessary documents.

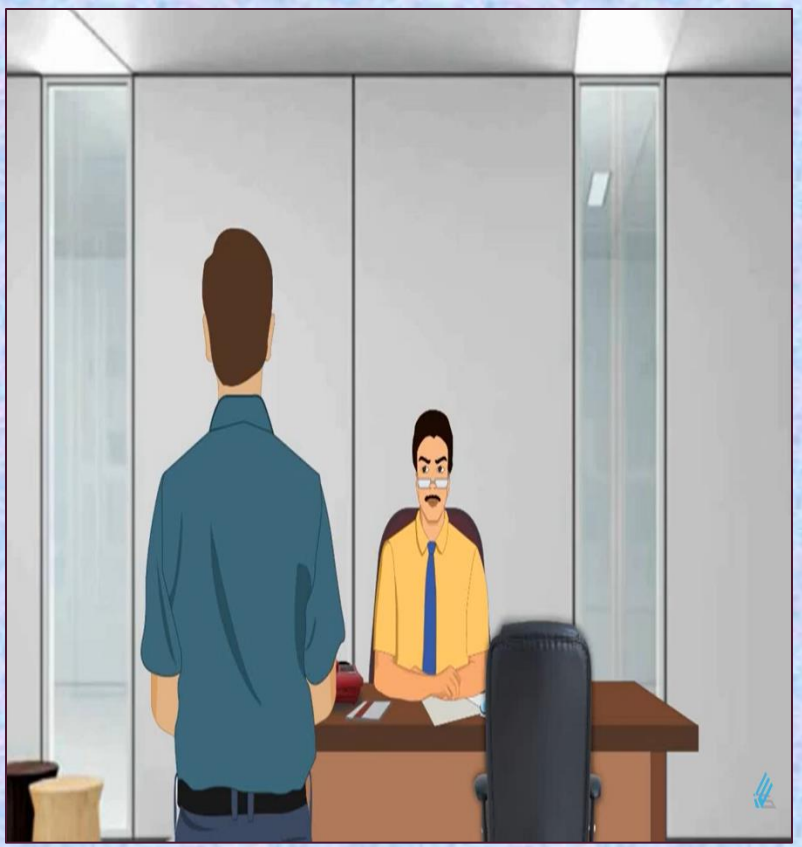

बहु-विषयक क्षेत्रीय रेल प्रशिक्षण संस्थान , धनबाद (भूली)

MULTI-DISCIPLINARY ZONAL RAILWAY TRAINING INSTITUTE, DHANBAD (Bhuli)

शिक्षार्थ आइये
सेवार्थ जाइये